


SURFACE-MOUNT MULTI-LAYER CERAMIC CHIP INDUCTORS

FAAIML-0805C SERIES



FEATURES:

- Multilayer ceramic structure
- Closed magnetic circuit
- Avoids crosstalk
- Excellent solderability
- High reliability
- Counter measures for complying with FCC,VDE,CSA,VCCI and CE

OPTIONS:

- Packaging:Tape & Reel is standard (Qty:4000pcs)
- Bulk packaging available for smaller quantities
- Tolerance:20% and 10% is standard, tighter tolerances available

COMMON APPLCATIONS:

- VCRs
- Mobil Radios
- Cordless Telephones
- Modems
- Global Positioning Systems
- Wireless Communications Equipment
- Network Systems
- Computer Products

ELECTRICAL CHARACTERISTICS:

Part Number	L (nH)	Q Min	SRF Mhz Min	DCR Max	IDC Max mA	Test Freq MHz
FAAIML-0805C-1N0	1.0	10	4000	0.10	300	100
FAAIML-0805C-1N2	1.2	10	4000	0.10	300	100
FAAIML-0805C-1N5	1.5	10	4000	0.10	300	100
FAAIML-0805C-1N8	1.8	10	4000	0.10	300	100
FAAIML-0805C-2N2	2.2	10	3800	0.10	300	100
FAAIML-0805C-2N7	2.7	10	3600	0.10	300	100
FAAIML-0805C-3N3	3.3	10	3400	0.13	300	100
FAAIML-0805C-3N9	3.9	10	3200	0.15	300	100
FAAIML-0805C-4N7	4.7	10	3000	0.20	300	100
FAAIML-0805C-5N6	5.6	10	2800	0.23	300	100
FAAIML-0805C-6N8	6.8	10	2600	0.25	300	100
FAAIML-0805C-8N2	8.2	10	2200	0.28	300	100
FAAIML-0805C-10N	10	10	1800	0.30	300	100
FAAIML-0805C-12N	12	10	1650	0.35	300	100
FAAIML-0805C-15N	15	10	1350	0.40	300	100
FAAIML-0805C-18N	18	10	1350	0.45	300	100
FAAIML-0805C-22N	22	15	1100	0.50	300	100
FAAIML-0805C-27N	27	15	1100	0.55	300	100
FAAIML-0805C-33N	33	15	1000	0.60	300	100
FAAIML-0805C-39N	39	15	900	0.65	300	100
FAAIML-0805C-47N	47	15	850	0.70	300	100
FAAIML-0805C-56N	56	15	750	0.75	300	100
FAAIML-0805C-68N	68	15	400	0.80	300	100
FAAIML-0805C-82N	82	15	600	0.90	300	100
FAAIML-0805C-R10	100	15	500	1.00	300	100
FAAIML-0805C-R12	120	15	450	1.30	250	100
FAAIML-0805C-R15	150	15	400	1.50	250	100
FAAIML-0805C-R18	180	15	350	1.80	250	100
FAAIML-0805C-R22	220	10	330	2.00	250	100
FAAIML-0805C-R27	270	10	300	2.50	250	100
FAAIML-0805C-R33	330	10	270	3.00	250	100
FAAIML-0805C-R39	390	10	220	3.50	250	100
FAAIML-0805C-R47	470	10	180	4.00	250	100

Note:1. K= 10%,M= 20%,N= 30%

TECHNICAL INFORMATION:

Testing:(Equivalent acceptable)

Inductance & Q-HP4195A+HP41951

DCR:VOAC-7412

SRF:HP8753C

Solderability:90% of the terminal

Electrode shall be covered

Preheat:@ 260 5 for 160 seconds

Solder:H63AA Eutectic Solder

Flux:Rosin,Dip for 5 seconds 1 second

Thermal Shock: Inductance shall be

Within 5% of imital value

and Q shall be within 30% of initial value

When temperatur is -40 and +85 for 30


Min.for each 100 cycles

Operating Temperature:-25 to +85

Storage Temperature: -40 to +85

PHYSICAL CHARACTERISTICS:

Dimensions: Inches (mm)

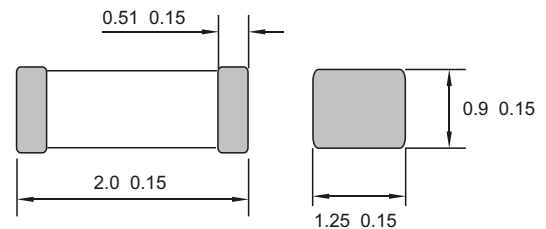

Note:All specifications subject to change without notice.