




Revised Record	1.0	New issue	2014-07-29						
----------------	-----	-----------	------------	--	--	--	--	--	--


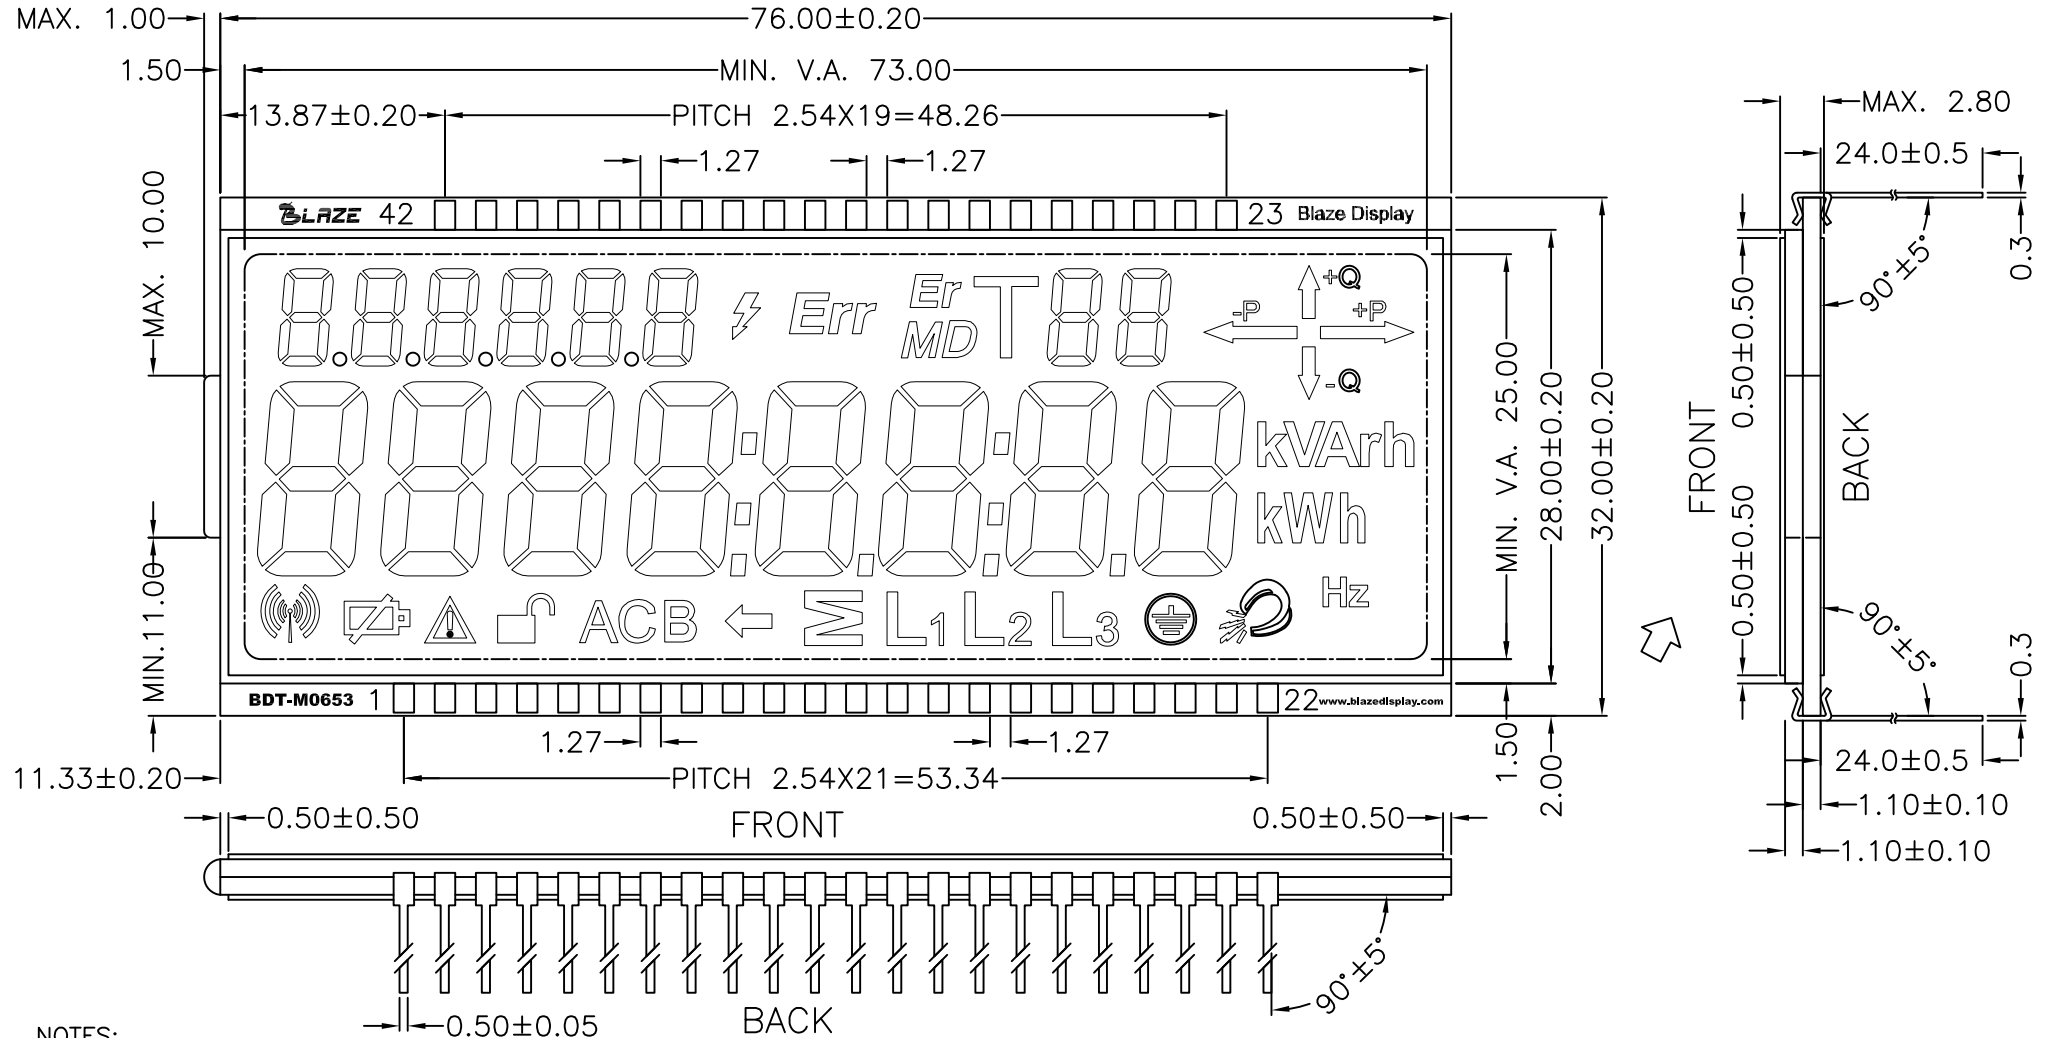


NOTES:


- | | |
|----------------------------|--|
| 01. DISPLAY TYPE: | TN/POSITIVE/REFLECTIVE(+UV+high durability) RoHS |
| 02. OPERATING VOLTAGE: | 3.0V 64Hz |
| 03. OPERATING TEMPERATURE: | -30°C~85°C |
| 04. STORAGE TEMPERATURE: | -40°C~90°C |
| 05. DRIVE MODE: | 1/4 DUTY 1/3 BIAS |
| 06. VIEWING DIRECTION: | 6:00 |
| 07. DRIVE IC: | NONE |
| 08. CONNECTOR: | PIN |
| 09. BACKLIGHT: | |
| 10. CUSTOMER'S PART ID: | |

BLAZE Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-15	BDT-M0653	VERSION: 1.0
CHECKED BY: BDT-09	 	PAGE 1 OF 4
APPROVED BY: BDT-03		UNIT: mm
Website: http://www.blazedisplay.com		DATE: 2014-07-29

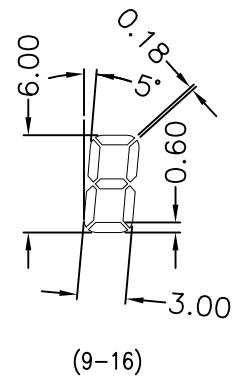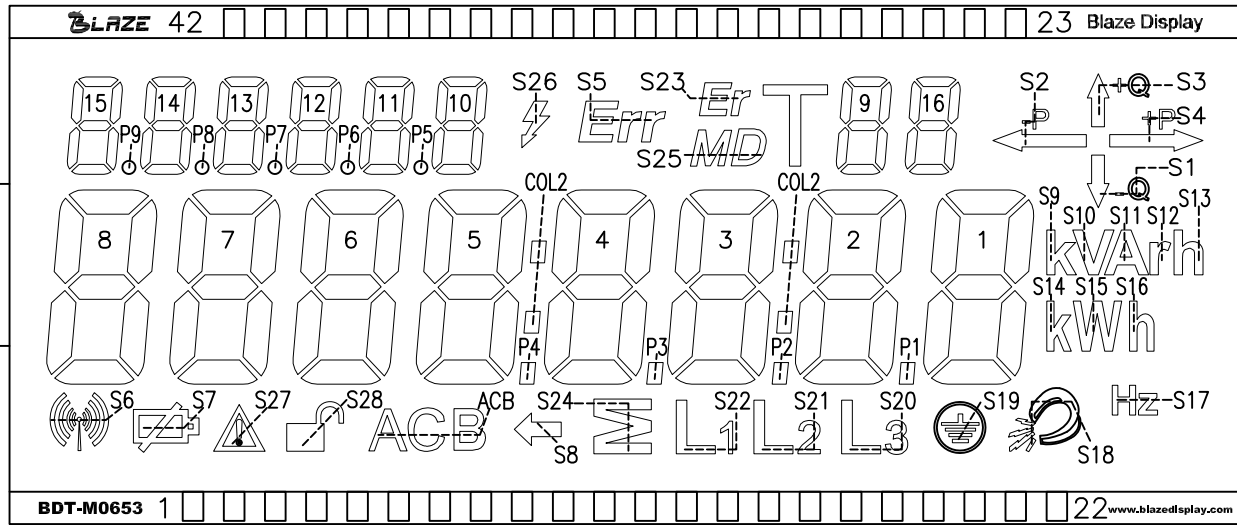


PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
COM0	8F	8A	7F	7A	6F	6A	5F	5A	S23	S25	4F	4A	3F	3A	2F	2A	1F	1A	S17	S9	S10
COM1	8G	8B	7G	7B	6G	6B	5G	5B	P4	COL2	4G	4B	3G	3B	2G	2B	1G	1B	S18	S14	S11
COM2	8E	8C	7E	7C	6E	6C	5E	5C	ACB	P2	4E	4C	3E	3C	2E	2C	1E	1C	S19	S15	S12
COM3	S6	8D	S27	7D	S7	6D	S8	5D	S24	S21	S22	4D	P3	3D	S28	2D	P1	1D	S20	S16	S13
PIN	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42
COM0	S3	/	/	/	COM0	16A	16F	9A	9F	10A	10F	11A	11F	12A	12F	13A	13F	14A	14F	15A	15F
COM1	S4	/	/	COM1	/	16B	16G	9B	9G	10B	10G	11B	11G	12B	12G	13B	13G	14B	14G	15B	15G
COM2	S2	/	COM2	/	/	16C	16E	9C	9E	10C	10E	11C	11E	12C	12E	13C	13E	14C	14E	15C	15E
COM3	S1	COM3	/	/	/	16D	S26	9D	T	10D	P5	11D	P6	12D	P7	13D	P8	14D	P9	15D	S5

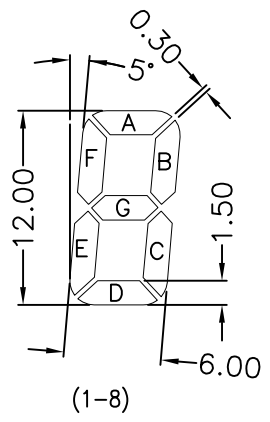


- NOTES:
- 01. DISPLAY TYPE: TN/POSITIVE/REFLECTIVE(+UV+high durability) RoHS
 - 02. OPERATING VOLTAGE: 3.0V 64Hz
 - 03. OPERATING TEMPERATURE: -30°C~85°C
 - 04. STORAGE TEMPERATURE: -40°C~90°C
 - 05. DRIVE MODE: 1/4 DUTY 1/3 BIAS
 - 06. VIEWING DIRECTION: 6:00
 - 07. DRIVE IC: NONE
 - 08. CONNECTOR: PIN
 - 09. BACKLIGHT:
 - 10. CUSTOMER'S PART ID:

BLAZE Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-15	BDT-M0653	VERSION: 1.0
CHECKED BY: BDT-09		PAGE 2 OF 4
APPROVED BY: BDT-03		UNIT: mm
Website: http://www.blazedisplay.com		DATE: 2014-07-29

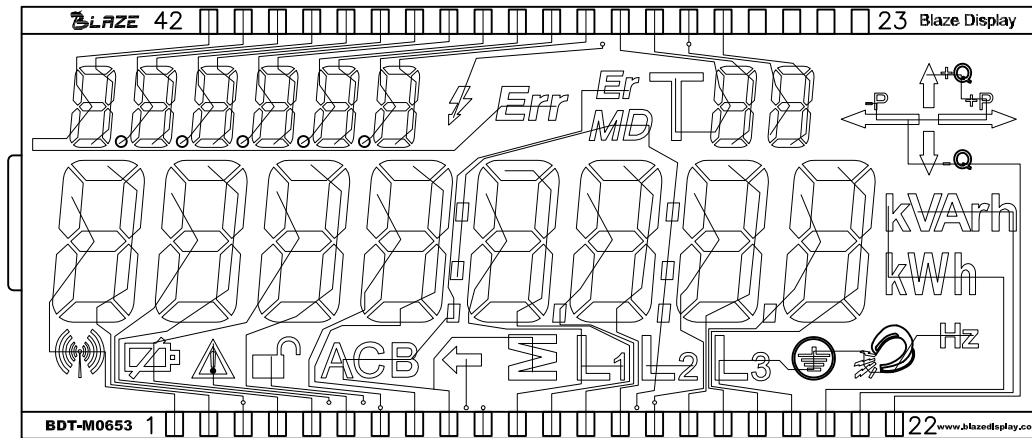

SEGMENT

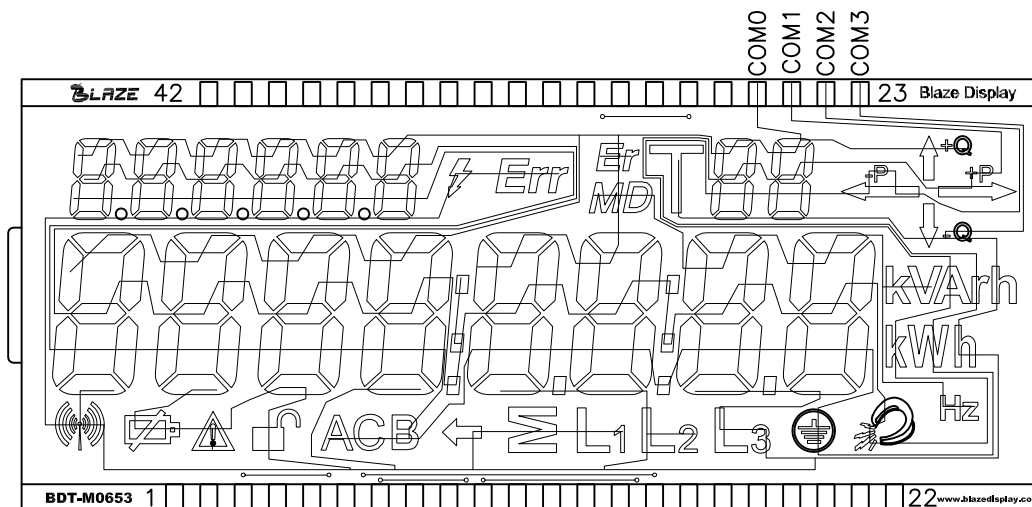



COMMON

NOTES:

- | | |
|----------------------------|--|
| 01. DISPLAY TYPE: | TN/POSITIVE/REFLECTIVE(+UV+high durability) RoHS |
| 02. OPERATING VOLTAGE: | 3.0V 64Hz |
| 03. OPERATING TEMPERATURE: | -30°C~85°C |
| 04. STORAGE TEMPERATURE: | -40°C~90°C |
| 05. DRIVE MODE: | 1/4 DUTY 1/3 BIAS |
| 06. VIEWING DIRECTION: | 6:00 |
| 07. DRIVE IC: | NONE |
| 08. CONNECTOR: | PIN |
| 09. BACKLIGHT: | |
| 10. CUSTOMER'S PART ID: | |

BLAZE Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-15	BDT-M0653	VERSION: 1.0
CHECKED BY: BDT-09		PAGE 3 OF 4
APPROVED BY: BDT-03		UNIT: mm
Website: http://www.blazedisplay.com		DATE: 2014-07-29

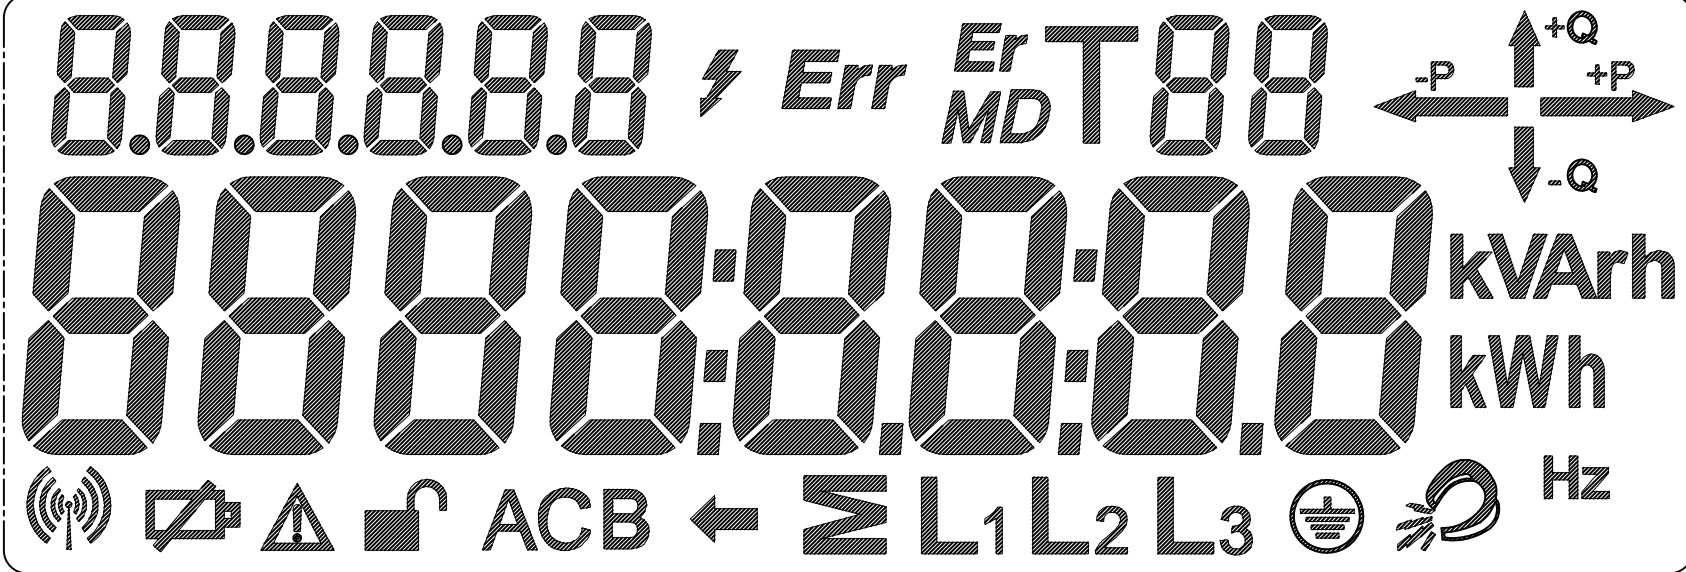


Show the result diagram

NOTES:

- | | |
|----------------------------|--|
| 01. DISPLAY TYPE: | TN/POSITIVE/REFLECTIVE(+UV+high durability) RoHS |
| 02. OPERATING VOLTAGE: | 3.0V 64Hz |
| 03. OPERATING TEMPERATURE: | -30°C~85°C |
| 04. STORAGE TEMPERATURE: | -40°C~90°C |
| 05. DRIVE MODE: | 1/4 DUTY 1/3 BIAS |
| 06. VIEWING DIRECTION: | 6:00 |
| 07. DRIVE IC: | NONE |
| 08. CONNECTOR: | PIN |
| 09. BACKLIGHT: | |
| 10. CUSTOMER'S PART ID: | |

BLAZE Blaze Display Technology Co.,Ltd.

DESIGNED BY: BDT-15	BDT-M0653	VERSION: 1.0
CHECKED BY: BDT-09		PAGE 4 OF 4
APPROVED BY: BDT-03		UNIT: mm
Website: http://www.blazedisplay.com		DATE: 2014-07-29